

Hedge Trimmers

RedMax offers an extensive line of powerful, environmentally-friendly hedge trimmers engineered for outstanding performance in any environment. Extra stability comes from caged-steel needle bearings that support blade-connecting rods. The blades are made of case-hardened, high-carbon steel to reduce the need for sharpening. All hedge trimmers incorporate double-reciprocating blades to provide fast, clean, manicured cuts. Our double-sided blades are best used for fast cutting in any direction when time is most important. When accuracy is the highest priority, the single-sided blades are used for accurate sculpting and creative cutting.



Hedge Trimmer Features

- Caged-steel needle bearings are located on the connecting rods to provide extra durability and a longer product life.
- Ball bearings support the precision-made, cut-steel gears inside the transmission.
- Case-connecting rods ride on fully-sealed needle bearings to provide low friction, long life and smooth operation.

Hedge Trimmer Accessories



Debris Catcher (Part Number 574 16 29-01)

Use the convenient RedMax debris catcher with the HTZ single-sided hedge trimmer to hold clippings and prevent them from falling into trimmed hedges.

▼ CHT2250

Displacement 22.5 cc
Power 0.7 HP
Weight 10.1 lbs
Blade Length 22"



▼ CHTZ2460 / L NEW

Displacement 23.6 cc
Power 1.14 HP
Weight 12.8 lbs / 13.3 lbs (L)
Blade Length 24" / 30" (L)



▼ HTZ2401,2460 / L NEW


Displacement 23.6 cc
Power 1.14 HP
Weight 12.3 lbs / 14.0 lbs (L)
Blade Length 30" / 40" (L)



Sealed bearing with connecting rod reduces wear and increases unit durability.


▼ SRTZ2460F NEW

Displacement 23.6cc
Power 1.14 HP
Weight 13.8 lbs
Blade Length 17"

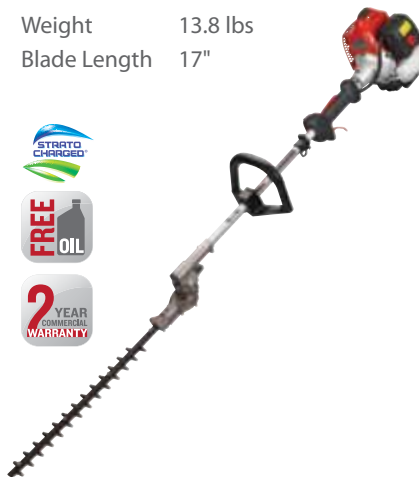


▼ SRTZ2460 NEW

Displacement 23.6 cc
Power 1.4 HP
Weight 14.0 lbs
Blade Length 20"
Blade Articulates 135°

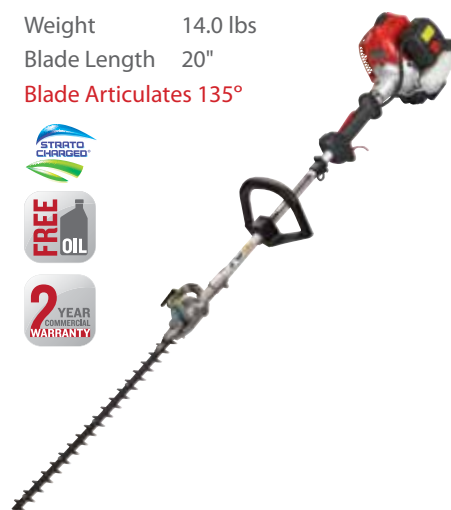

▼ LRTZ2460 NEW

Displacement 23.6cc
Power 1.14 HP
Weight 14.6 lbs
Blade Length 20"
Blade Articulates 135°

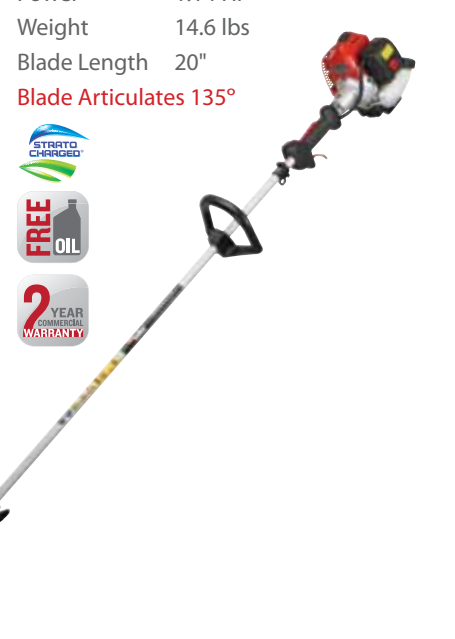

Most models feature our Strato-Charged® engine technology. For more information see page 4.

Model (50 States)	Part Number	Engine Size (CC)	Engine Type	Blade Length (Inches)	Shaft Length (Inches)	Articulate Angle	Horsepower (HP)	Dry Weight (Lbs.)	Fuel Capacity (Fl. Oz.)	Warranty ¹ (Cons.) (Com.)
CHT2250	966 14 17-01	22.5	2-Stroke	22	n/a	n/a	0.7	10.1	20.0	2 Yrs. 1 Yr.
CHTZ2460	966 14 07-01	23.6	Strato-Charged®	24	n/a	n/a	1.14	12.8	15.9	2 Yrs. 2 Yrs.
CHTZ2460L	966 14 09-01	23.6	Strato-Charged®	30	n/a	n/a	1.14	13.3	15.9	2 Yrs. 2 Yrs.
HTZ2401 ²	970 25 54-01	23.6	Strato-Charged®	30	n/a	n/a	1.14	12.3	15.9	2 Yrs. 2 Yrs.
HTZ2460	966 14 06-01	23.6	Strato-Charged®	30	n/a	n/a	1.14	12.0	15.9	2 Yrs. 2 Yrs.
HTZ2460L	966 14 08-01	23.6	Strato-Charged®	40	n/a	n/a	1.14	14.0	15.9	2 Yrs. 2 Yrs.
SRTZ2460F	966 59 90-01	23.6	Strato-Charged®	17	29.5	0	1.14	13.8	21.3	2 Yrs. 2 Yrs.
SRTZ2460	966 58 83-01	23.6	Strato-Charged®	20	29.5	135	1.14	14.0	21.3	2 Yrs. 2 Yrs.
LRTZ2460	966 58 85-01	23.6	Strato-Charged®	20	59	135	1.14	14.6	21.3	2 Yrs. 2 Yrs.

¹ Ignition coil includes lifetime warranty ² Not available in California