

▶ Trimmers & Brushcutters

RedMax's line of heavy-duty, commercial-grade trimmers can clear, trim or edge multiple acreage estates with ease. RedMax trimmers include solid-steel drive shafts that are splined on both ends. This reduces vibration and improves acceleration, creating a much higher load-carrying capacity. The result is an efficient, low-friction, smooth-running machine that is comfortable to use. Solid-steel drive shaft systems deliver trouble-free operation with no maintenance and downtime when compared to flex-cable or flex-shaft units. RedMax brushcutters are built to withstand the most difficult clearing jobs from tough grasses and shrubs to dense undergrowth. Equipped with heavy-duty integrated vibration reduction systems and ergonomic handles and grips, these superior units are easy-to-use while also focusing on maximizing user comfort in the field.



▼ MaxTorque Models BCZ2460TS, BCZ2660TS, BCZ3060TS Features & Benefits*

Most RedMax trimmer and brushcutter models have a 2 year commercial warranty and lifetime ignition coil warranty.



MaxTorque model trimmers feature our Strato-Charged® engine technology which reduces impact on the environment through efficient engine design, increased fuel economy and reduced emissions. For more information see page 4.



The MaxClean commercial duty felt element air filtration system prolongs engine life.

MaxComfort grip with rubber molding and grouped controls provides easy operation and comfort.

Free Flow "Air Net" system protects engine from overheating. (BCZ2460TS, BCZ3060TS)

The long MaxFlex throttle trigger is virtually impossible to break.

Cushioned loop handle reduces vibration.

DAMPER SHAFT



New light weight hollow drive shaft with damper reduces vibration by approximately 20%.

Heavy-duty 4 bearing gear case with grease fitting for long life.

DEBRIS GUARD

The redesigned debris guard provides exceptional working area visibility for all kinds of usages.

- Heavy-duty blade features 2 screw mounts.
- Ample room to dodge nylon line.

PT104 Plus commercial-duty tap head with Cable Twist™ line. Metal blade capable with required safety equipment. (See Operator Manual for more information).

*See page 12 for full model line up and specifications. Features may vary by model.

Residential

Light Duty Commercial

Commercial - Maximum Torque

▼ BT280



Displacement 28.0 cc
Power 1.1 HP
Weight 10.0 lbs



▼ BC280



Displacement 28.0 cc
Power 1.1 HP
Weight 11.0 lbs



▼ TR2350


Displacement 21.7 cc
Power 1.0 HP
Weight 9.0 lbs



▼ BCZ2450T/2460TS




Displacement 23.6 cc
Power 1.14 HP
Weight 11.3 / 11.2 lbs

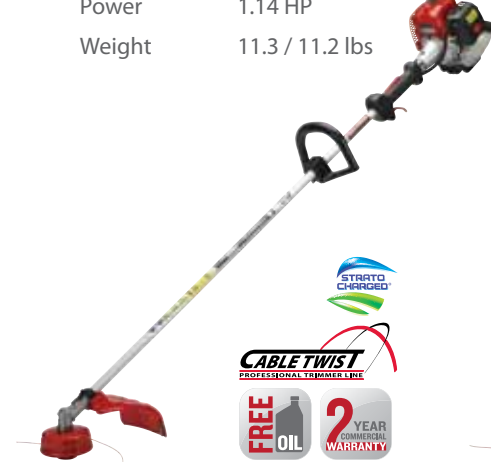

▼ BCZ2650T / 2660TS



Displacement 25.4 cc
Power 1.2 HP
Weight 11.8 / 11.5 lbs

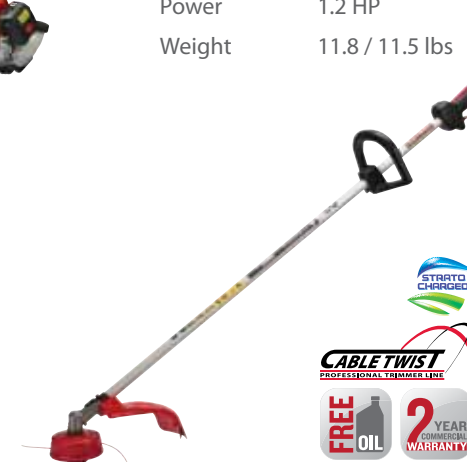

▼ BCZ3060TS



Displacement 29.5 cc
Power 1.4 HP
Weight 12.2 lbs



Commercial - Regular Torque

▼ BCZ2460S




Displacement 23.6 cc
Power 1.14 HP
Weight 11.1 lbs



▼ BCZ2650S

Displacement 25.4 cc
Power 1.2 HP
Weight 11.6 lbs

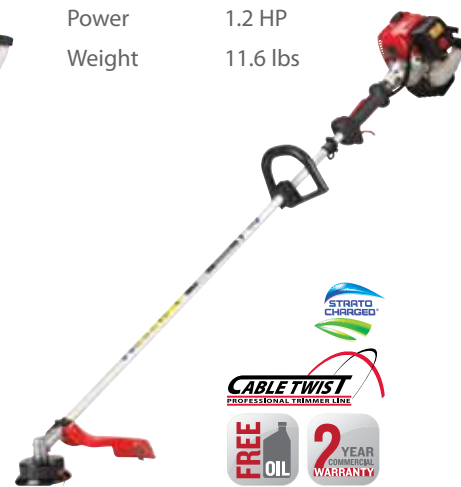

▼ BCZ3050S

Displacement 29.5 cc
Power 1.4 HP
Weight 12.3 lbs



Brushcutter

▼ BCZ3050SW

Displacement 29.5 cc
Power 1.4 HP
Weight 13.0 lbs



Brushcutter Harness
(Part Number 521 43 37-01)



"W" Handle Kit
(Part Number 526 01 59-01)

Blade Kit

(3 Bearing Gear Case - PN 970 37 10-01)
(4 Bearing Gear Case - PN 970 25 10-01)



*See page 14 for additional trimmer and brushcutter attachments.

Model (50 States)	Part Number	Engine Size (CC)	Engine Type	Horse-power (HP)	Drive Shaft	Dry Weight ¹ (Lbs.)	Fuel Capacity (Fl. Oz.)	Warranty ² (Cons.) (Com.)	
BT280	952 71 19-66	28.0	2-Stroke	1.1	Cable	10.0	13.5	2 Yrs.	1 Yr.
BC280	952 71 19-67	28.0	2-Stroke	1.1	Cable	11.0	13.5	2 Yrs.	1 Yr.
TR2350S	966 31 95-01	21.7	2-Stroke	1.0	Solid steel	9.0	16.9	2 Yrs.	1 Yr.
BCZ2460S	966 59 86-01	23.6	Strato-Charged®	1.14	Hollow steel with damper	11.1	21.3	2 Yrs.	2 Yrs.
BCZ2650S	966 33 04-01	25.4	Strato-Charged®	1.2	Solid steel	11.6	22.0	2 Yrs.	2 Yrs.
BCZ3050S	966 33 66-01	29.5	Strato-Charged®	1.4	Solid steel	12.3	24.3	2 Yrs.	2 Yrs.

¹Without cutting head and strap ²Ignition coil includes lifetime warranty

Model (50 States)	Part Number	Engine Size (CC)	Engine Type	Horse-power (HP)	Drive Shaft	Dry Weight ¹ (Lbs.)	Fuel Capacity (Fl. Oz.)	Warranty ² (Cons.) (Com.)	
BCZ2450T	966 32 61-01	23.6	Strato-Charged®	1.14	Solid steel	11.3	21.3	2 Yrs.	2 Yrs.
BCZ2460TS	966 59 87-01	23.6	Strato-Charged®	1.14	Hollow steel with damper	11.2	21.3	2 Yrs.	2 Yrs.
BCZ2650T	966 33 05-01	25.4	Strato-Charged®	1.2	Solid steel	11.8	22.0	2 Yrs.	2 Yrs.
BCZ2660TS	966 59 92-01	25.4	Strato-Charged®	1.2	Hollow steel with damper	11.5	22.0	2 Yrs.	2 Yrs.
BCZ3060TS	966 59 93-01	29.5	Strato-Charged®	1.4	Hollow steel with damper	12.2	24.3	2 Yrs.	2 Yrs.
BCZ3050SW	966 33 68-01	29.5	Strato-Charged®	1.4	Solid steel	13.0	24.3	2 Yrs.	2 Yrs.

¹Without cutting head and strap ²Ignition coil includes lifetime warranty